


LED Intelligent Driver

5W~50W 500~1750mA 10~54V DC

- Dimming interface: Triac/ELV, Push DIM
- Apply to leading edge and trailing edge TRIAC dimmers
- PWM digital dimming, no alter LED color rendering index.
- Dimming range: 0~100%, LED start at 0.1% possible.
- Efficiency > 85%
- Multiple current, wide voltage, compatible with a variety of LED lights.
- Short circuit / Over-temperature / Over load / Non-load protection.
- Non-load output voltage 0V to prevent damages to LED caused by poor contact.
- Class 2 power supply. Full protective plastic housing.
- Compliant with Safety Extra Low Voltage standard.
- Suitable for indoor environments.



SELV **CE** **RoHS**



Main Characteristics

Dimming interface: Triac/ELV, Push DIM
 Input Voltage Range: 200-240Vac ±10%
 Frequency: 50/60Hz
 Input Current: 230Vac ≤ 0.55A
 Efficiency: ≥ 85%
 Inrush Current(typ.): Cold start 40A at 230Vac
 Leakage Current: < 0.5mA/230Vac
 Operating Voltage: 10-54Vdc
 Output Power Range: 5W-50W
 Current Accuracy: ±3%
 Output Current : 500mA | 700mA | 900mA | 1050mA | 1200mA | 1450mA | 1600mA | 1750mA
 Output Voltage: 10-54V | 10-54V | 10-54V | 10-48V | 10-42V | 10-34V | 10-32V | 10-29V
 Output Power: 5-27W | 7-37.8W | 9-48.6W | 10.5-50.4W | 12-50.4W | 14.5-49.3W | 16-51.2W | 17.5-50.8W

Max Output Voltage: 58Vdc
 No Load Output Voltage: 0Vdc
 Dimming Range: 0~100%, LED start at 0.1% possible.
 Working Temperature: tc: 85°C ta: -30°C ~ 55°C
 Working Humidity: 20 ~ 95%RH, non-condensing
 Storage Temp., Humidity: -40 ~ 80°C, 10-95%RH
 Temp. Coefficient: ±0.03%/°C(0-50°C)
 Vibration: 10~500Hz, 2G 12min./1cycle, period for 72min. each along X, Y, Z axes.

* The dimming range parameters adopted LUTRON® dimming system as testing standards. The parameters may differ by using Triac/ELV dimming systems of different brands. We can customize program for clients' high requirements.

Attn: LUTRON® is registered trademarks of Lutron Electronics Co., Inc. registered in the U.S. and other countries

Protection

Over-heat Protection: Shut down the output when PCB temp. ≥ 110°C, auto recovers when temp. back to normal.
 Over Load Protection: When O/P voltage exceed its range, O/P current declines, auto recovers when the load is reduced.
 Short Circuit Protection: Shut down automatically if short circuit occurs, auto recovers after faulty condition is removed.
 Non-load Protection. Auto detecting, auto recovers when load back to normal.


Safety & EMC


Withstand Voltage: I/P-O/P: 3750Vac
 Isolation Resistance: I/P-O/P: 100MΩ/500VDC/25°C/70%RH
 Safety Standards: IEC/EN61347-1, IEC/EN61347-2-13
 EMC Emission: EN55015, EN61000-3-2 Class C, IEC61000-3-3
 EMC Immunity: EN61000-4-2,3,4,5,6,8,11 EN61547

Others

Dimension: 133×89×30mm(L×W×H)
 Packing: 135×90×35mm(L×W×H)
 Weight[G.W.]: 240g±10g

Dimensions



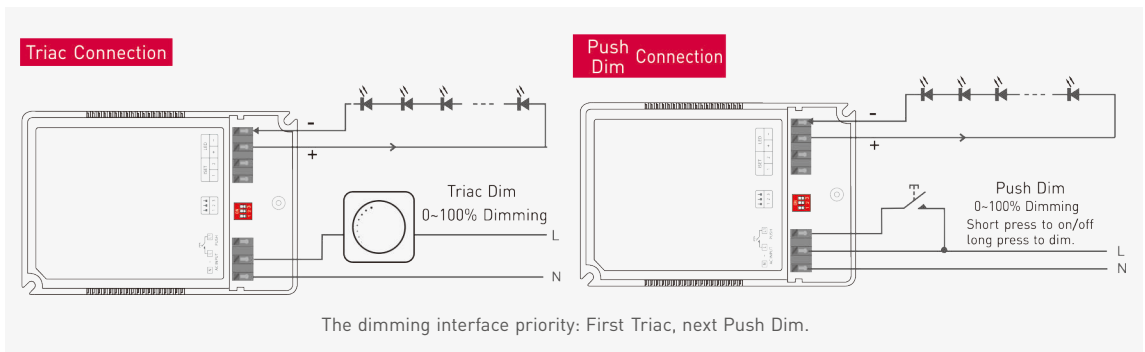


Selecting between ordinary dimmer and dimming system

Ordinary dimmer and dimming system have different dimming precision, precision of dimming system is higher. To meet customers' requirements on perfect dimming effects, we LTECH designed two programme options.



Method: Turn off the power and then remove the housing of the LED driver to find right component on the PCB. Shift system by selecting different contact pin (For installation professionals use only). Factory default as 1-2 (For ordinary dimmer).



Push Dimming



Reset Switch

- On/off control: Short press.
- Stepless dimming: Long press.
- With every other long press, the light level goes to the opposite direction.
- Dimming memory: Brightness will be the same as previously adjusted when turning off and on again.

LED Current Selection

Quick options: DIP switch for 8 optional currents' quick selection[see the table below].

500mA/ISET 10-54V	700mA 10-54V	900mA 10-54V	1050mA 10-48V	1200mA 10-42V	1450mA 10-34V	1600mA 10-32V	1750mA 10-29V	ON	OFF

* After current setting by DIP switch, power off and then power on to make the new current effective.

* E.g. LED 3.2V/pcs: 10-54V can power 3-16pcs LEDs in series, 10-29V can power 3-9pcs LEDs, the max quantity of LEDs in series will be subject to the actual voltage of LED.

Advanced options: Dial DIP switch down , connect ISET port with resistors of different values to set up any current from 500mA to 1750mA (specific resistor values refer to the table).

Connect to resistor

Current(mA)	500mA	550mA	600mA	650mA	700mA	750mA	800mA	850mA	900mA
Resistor(KΩ)	∞	130.08KΩ	83.5 KΩ	60.02 KΩ	46.37KΩ	37.01 KΩ	30.1 KΩ	25.24 KΩ	21.28 KΩ
Current(mA)	950mA	1000mA	1050mA	1100mA	1150mA	1200mA	1250mA	1300mA	1350mA
Resistor(KΩ)	18.15 KΩ	15.65 KΩ	13.5 KΩ	11.62 KΩ	10.8 KΩ	8.78 KΩ	7.57 KΩ	6.41 KΩ	5.65 KΩ
Current(mA)	1400mA	1450mA	1500mA	1550mA	1600mA	1650mA	1700mA	1750mA	
Resistor(KΩ)	4.81 KΩ	4.07 KΩ	3.4 KΩ	2.68KΩ	2.13 KΩ	1.63 KΩ	1.18 KΩ	0 KΩ	