



GA-016 CAFETERIA

- Lival innovation – ECG fitted inside the adapter
- Good light in small form factor – no separate housing part

GA-016 CAFETERIA

Input Power	CRI & CCT Options	Colour Consistency	Installation Type	Material	Warranty	Beam Angles	Luminaire Color
220 – 240V	CRI 80+ 3000K, 4000K, 5000K CRI 90+ 2700K B.BBL, 3000K B.BBL, 3500K B.BBL, 4000K	3-Step MacAdam	NoA & Most 3-phase Tracks	Powder Painted Die-Cast Aluminum	50 000h Or 5 Years	1206 COB: S 15° NFL 20° FL 30° WFL 50°	White (RAL 9016) Silver (Ca. RAL 9006) Black (RAL 9005)

LED Module: Citizen CLU038-1206 5-Gen – COB luminous flux:

Output Current /
Module Wattage /
System Wattage:


700mA / 25W / 27W

750mA / 27W / 29W

800mA / 29W / 31W

850mA / 31W / 33W

	CRI 80+ 3 000K	CRI 80+ 4 000K	CRI 80+ 5 000K	CRI 90+ 2 700K Below BBL	CRI 90+ 3 000K Below BBL	CRI 90+ 3 500K Below BBL	CRI 90+ 4 000K
700mA / 25W / 27W	3 575Lm	3 675Lm	3 725Lm	2 725Lm	2 825Lm	2 875Lm	3 050Lm
750mA / 27W / 29W	3 725Lm	3 850Lm	3 900Lm	2 825Lm	2 950Lm	3 000Lm	3 200Lm
800mA / 29W / 31W	3 975Lm	4 075Lm	4 150Lm	3 000Lm	3 125Lm	3 200Lm	3 425Lm
850mA / 31W / 33W	4 200Lm	4 300Lm	4 375Lm	3 150Lm	3 300Lm	3 350Lm	3 575Lm

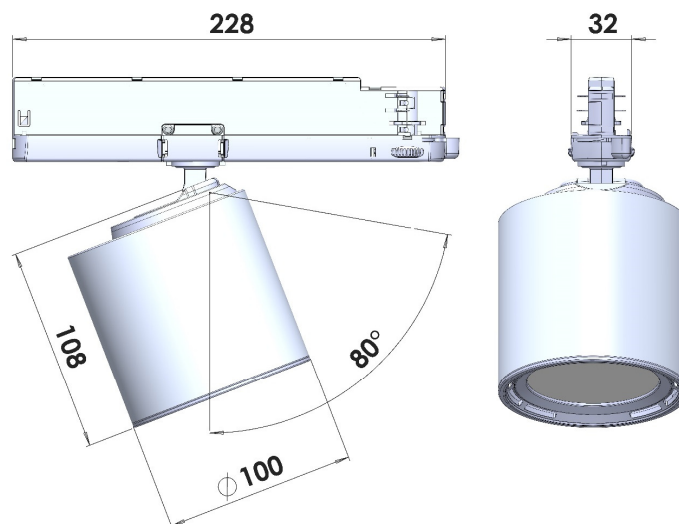

IP20

LED Design | Made In Finland

LIVAL